


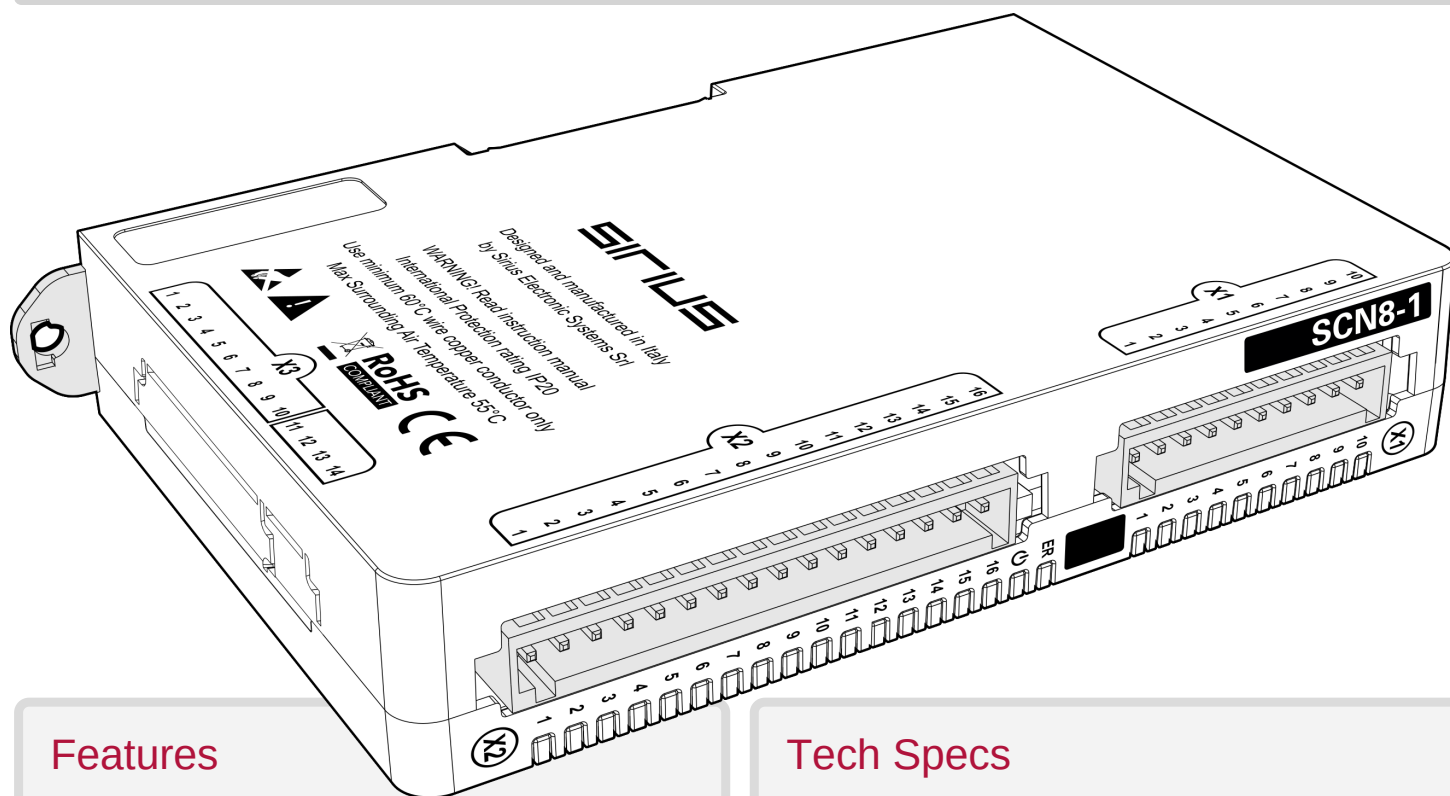

Features

Industrial grade differential conditioner board powered at 24Vdc

7 differential 5V input

7 digital output @24V





Output equipped with short-circuit protection, input with over-voltage protection

Optocoupled signal from input to output

Tech Specs

I/O input Power	24Vdc $\pm$ 20%
Differential Input	7 @ 5VDC
Digital Output	7 @ 24V push-pull
Reverse polarity	Logic circuit, diode
Storage C°	-40 to +85 °C
Operating C°	0 to +55 °C
Humidity	0 to 95%, non condensing
Size (L x H x W)	150 x 91 x 24.5 mm
Weight	160 g
Mounting	M3 screws or TS 35 DIN rail

SCN8-1 Differential Conditioner Device

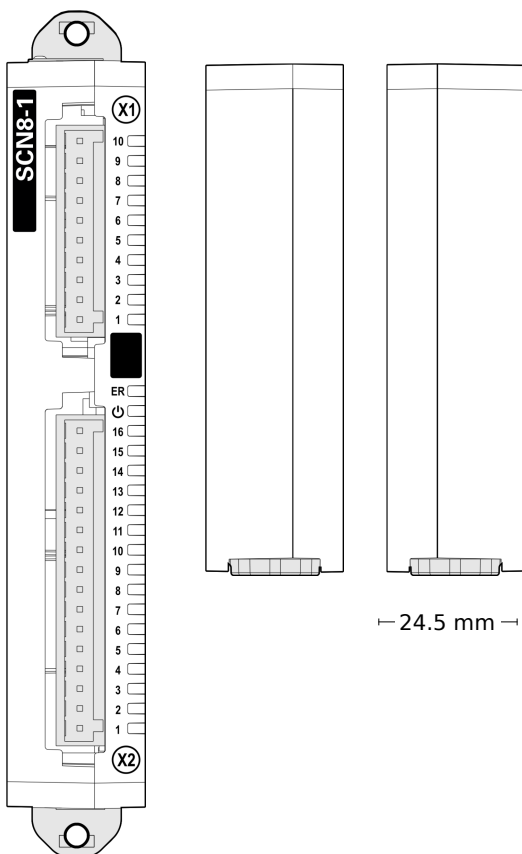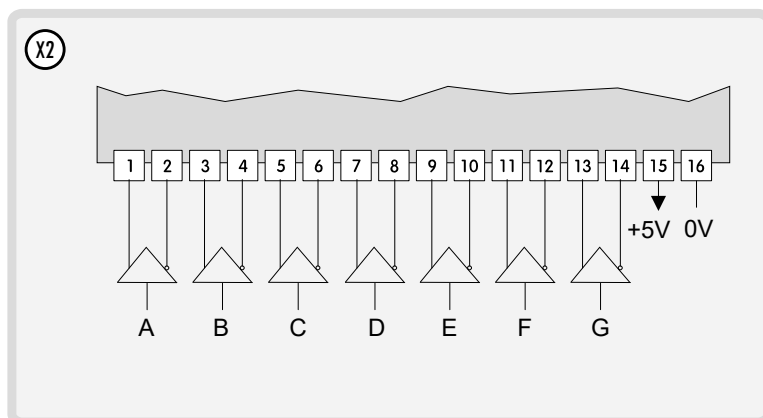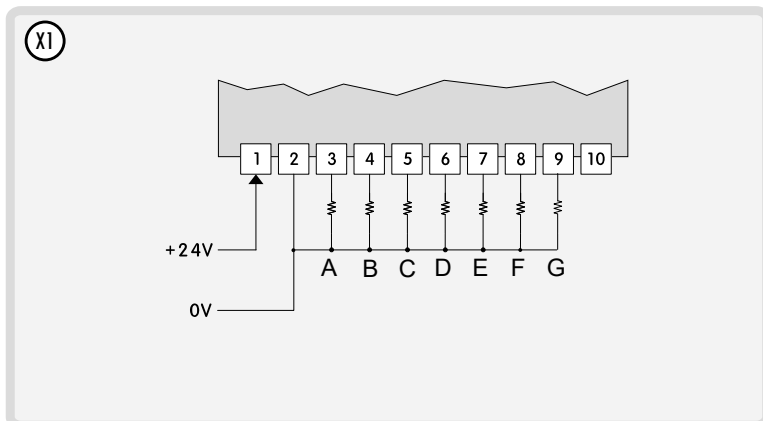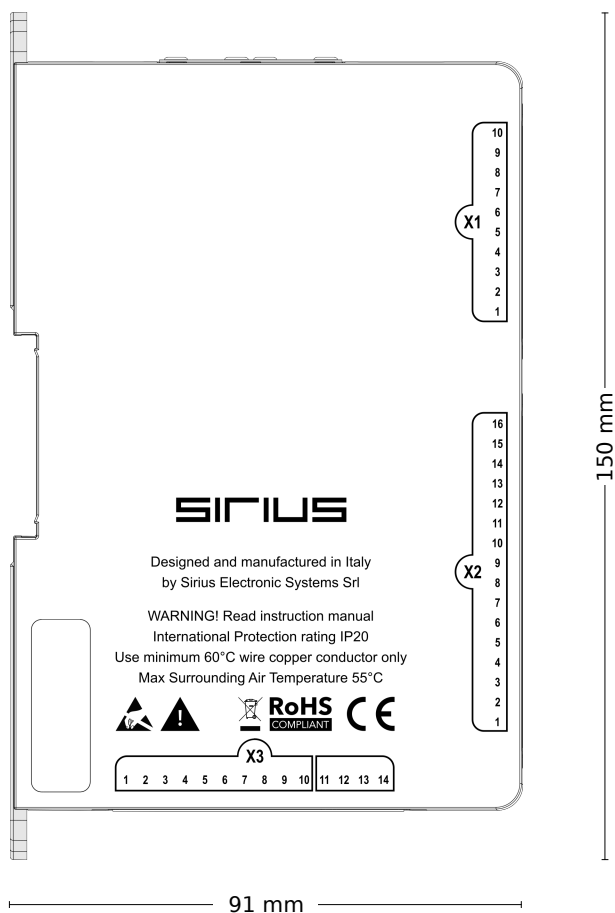

CANopen® is a registered trade mark, property of CiA® (CAN in Automation e.V.), Germany (→ www.can-cia.org)

Rev 2 2026/05/19